

Reflow Soldering of MEMS Microphones

INTRODUCTION

This application note provides guidance and suggestions for assembling boards with MEMS microphones. Parameter and profile details are presented, followed by device footprints, suggested solder paste masks, and PCB land patterns for all InvenSense MEMS microphones.

PACKAGE INFORMATION

All MEMS microphone models described in this application note are bottom-port devices.

PRINTING PARAMETERS

The printing parameters are:

- Print pressure = 3 kg
- Print speed = 30 mm/sec
- Squeegee type = metal
- Squeegee angle = 60°

SOLDER PASTE STENCIL PARAMETERS

The solder paste stencil parameters are:

- Stencil type = laser cut
- Stencil thickness = 3 mils (~75 µm)

SUGGESTED SOLDER PASTE

The suggested solder paste is Indium8.9 (Type 4—alloy composition—96.5Sn/3.0Ag/0.5Cu (SAC305)). This paste is an air reflow, no-clean solder paste specifically formulated to accommodate the higher processing temperatures required by the Sn/Ag/Cu, Sn/Ag, and other alloy systems favored by the electronics industry to replace conventional Pb-bearing solders.

PLACEMENT FORCE

MEMS microphones can be handled using standard pick-and-place and chip shooting equipment. Care should be taken to avoid damage to the MEMS microphone structure as follows:

- Use a standard pickup tool to handle the microphone. Because the microphone hole is on the bottom of the package, the pickup tool can make contact with any part of the lid surface.
- Do not pick up the microphone with a vacuum tool that makes contact with the bottom side of the microphone. Do not pull air out of or blow air into the microphone port.
- Do not use excessive force to place the microphone on the PCB.

REFLOW PROFILE

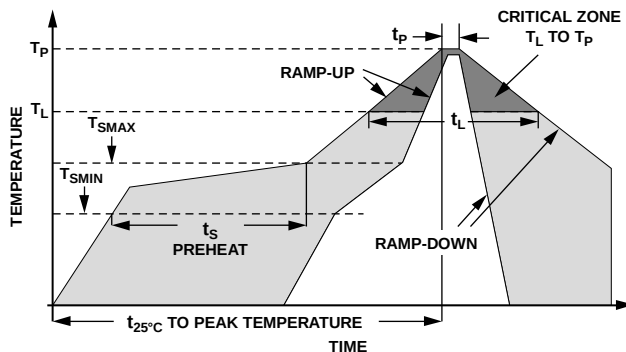


Figure 1. Recommended Soldering Profile Limits

The reflow profile in Figure 1 is recommended for board manufacturing with InvenSense MEMS microphones. These microphones are also compatible with the J-STD-020 profile.

TABLE 1. RECOMMENDED SOLDERING PROFILE LIMITS

Profile Feature	Sn-Pb	Pb-Free
Average Ramp Rate (T _L to T _P)	1.25°C/sec max	1.25°C/sec max
Preheat		
Minimum Temperature (T _{SMIN})	100°C	100°C
Maximum Temperature (T _{SMAX})	150°C	200°C
Time (T _{SMIN} to T _{SMAX}), t _S	60 sec to 75 sec	60 sec to 75 sec
Ramp-Up Rate (T _{SMAX} to T _L)	1.25°C/sec	1.25°C/sec
Time Maintained Above Liquidous (t _L)	45 sec to 75 sec	~50 sec
Liquidous Temperature (T _L)	183°C	217°C
Peak Temperature (T _P)	215°C +3°C/-3°C	260°C +0°C/-5°C
Time Within 5°C of Actual Peak Temperature (t _P)	20 sec to 30 sec	20 sec to 30 sec
Ramp-Down Rate (T _P to T _L)	3°C/sec max	3°C/sec max
Time 25°C (t _{25°C}) to Peak Temperature	5 minutes max	5 minutes max

REWORK

The rework process of the MEMS microphone should be carried out using a rework station.

1. Preheat the board to 100°C to 125°C.
2. Place a 6 mm × 6 mm square nozzle over the part.
3. Enable the hot airflow through this nozzle so that the solder becomes liquidous.
4. Use the nozzle to remove the microphone from the substrate.
5. Apply additional solder paste to pad sites using a manually operated dispensing system, such as a syringe with a small-gauge tip.
6. Use a surface-mount placement machine to place the replacement component.
7. Reflow the component on the rework station.

CAUTION

The MEMS microphone package has a port hole opening at the bottom and is sensitive to solder flux. Do not use a vapor phase soldering process. The MEMS microphone device may be damaged if subjected to cleaning processes. The cleaning solvents may enter through the port hole and damage the device.

CE-6-1 PACKAGE (ADMP401, ADMP411)

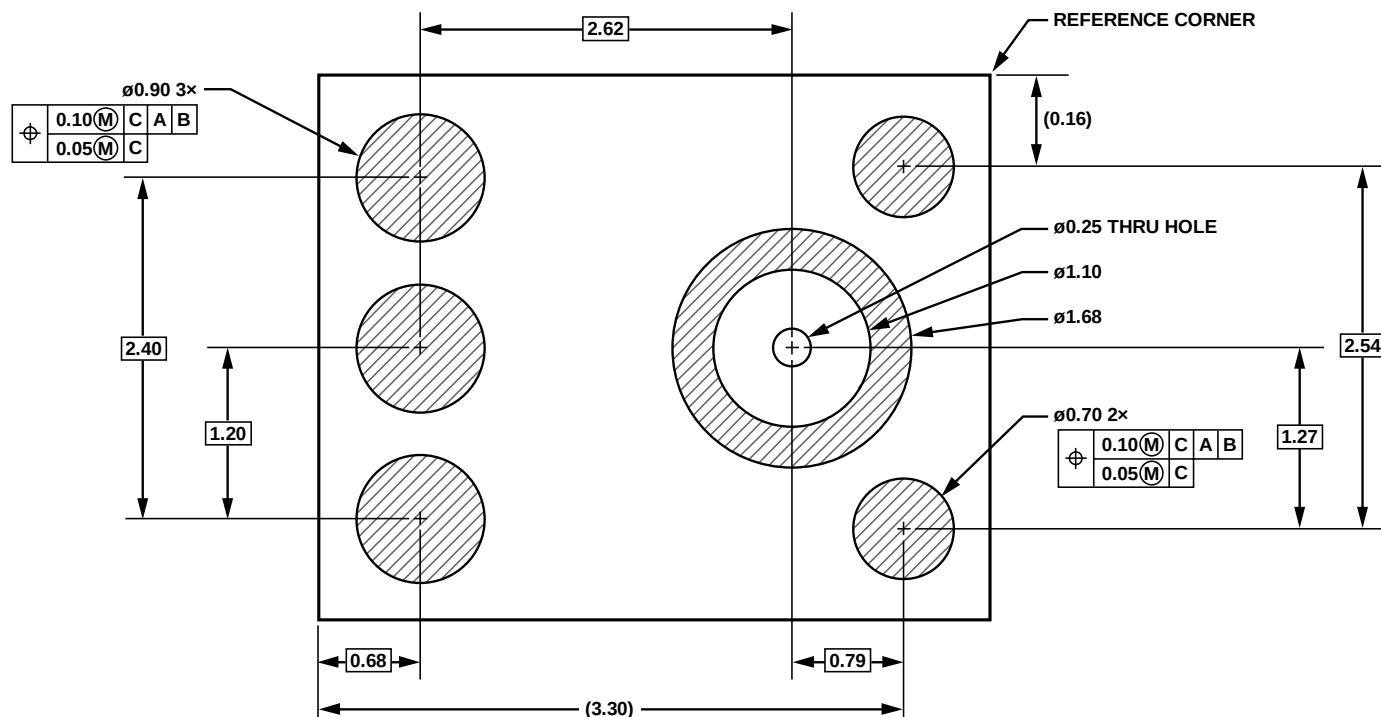


Figure 2. CE-6-1 Device Footprint (Bottom View)

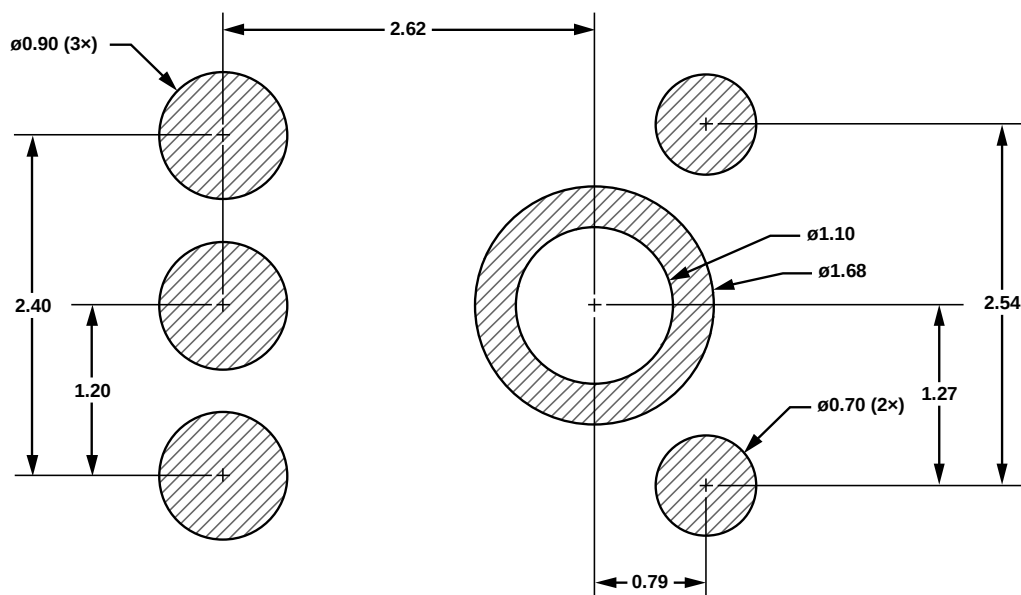


Figure 3. Recommended CE-6-1 PCB Land Pattern

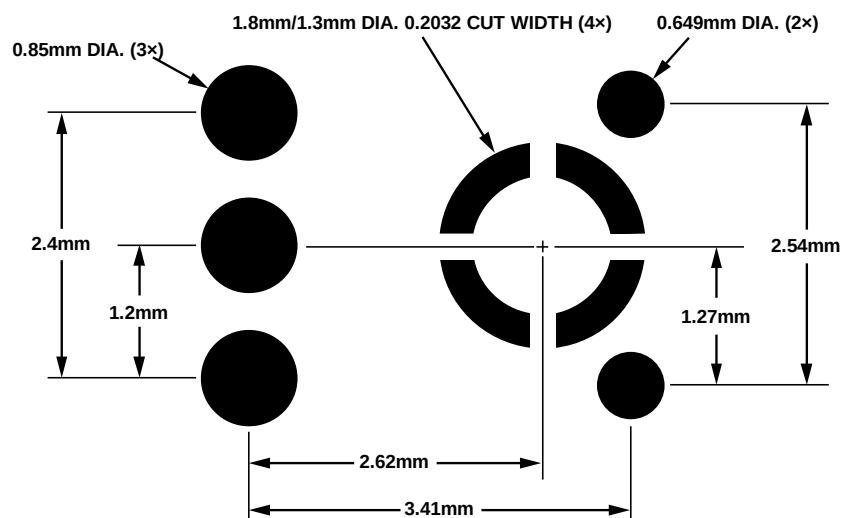


Figure 4. Recommended CE-6-1 Solder Paste Mask

CE-5-1 PACKAGE (ADMP421, ADMP521, ADMP522, ADMP621)

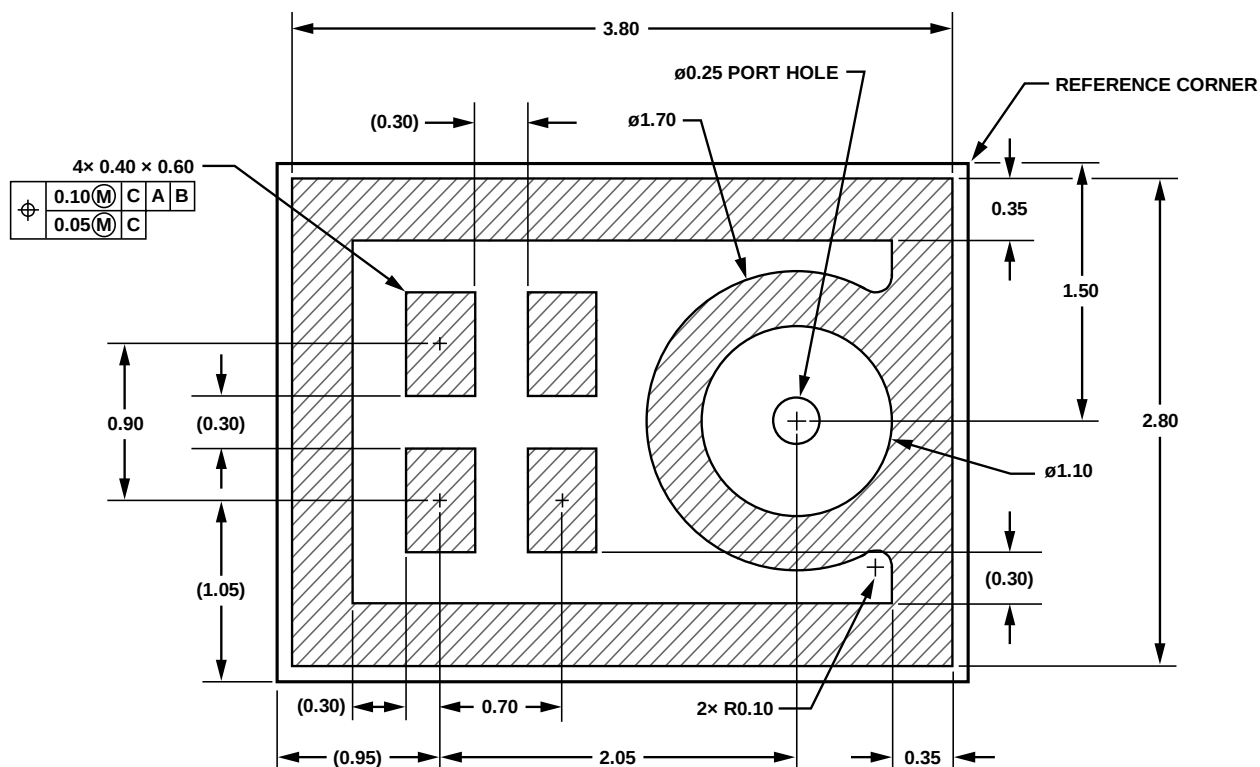


Figure 5. CE-5-1 Device Footprint (Bottom View)

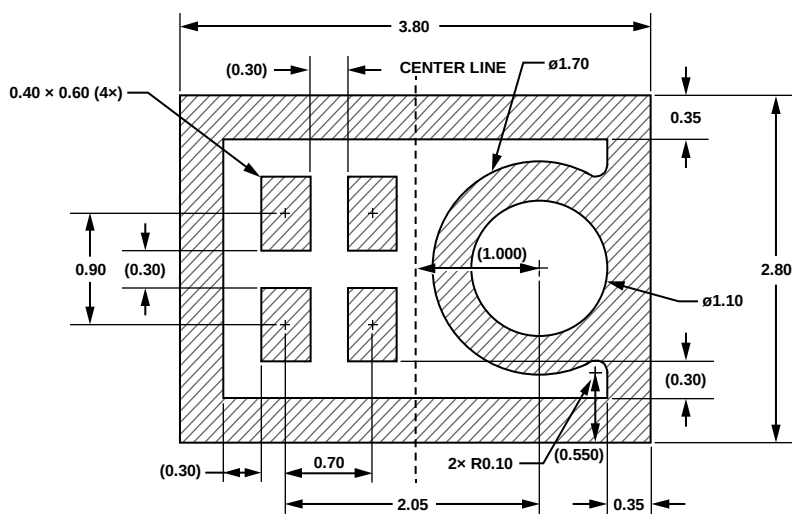


Figure 6. Recommended CE-5-1 PCB Land Pattern



CE-3-2 PACKAGE (ADMP404, ADMP405, ADMP504, ADMP510)

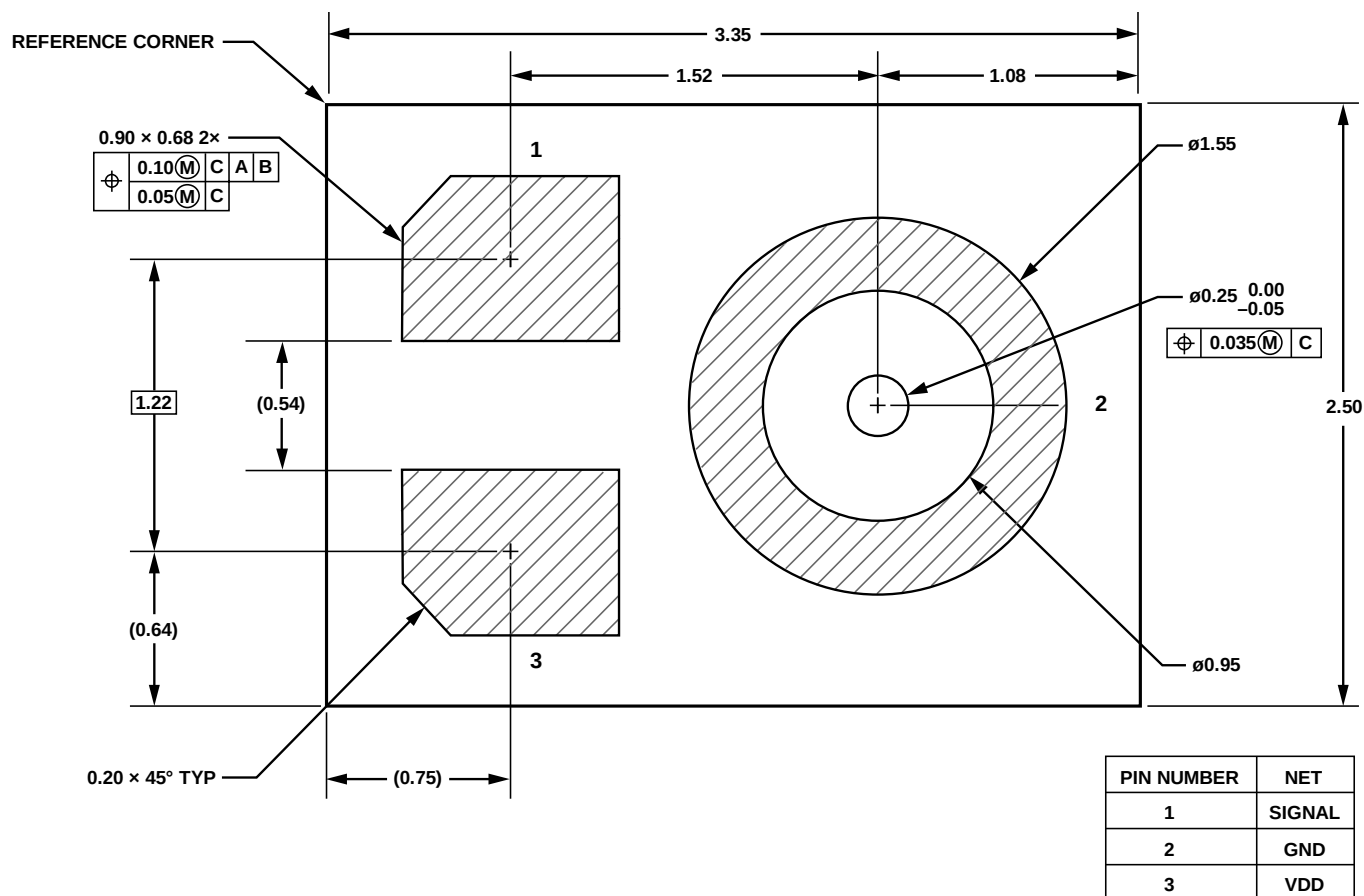


Figure 8. CE-3-2 Device Footprint (Bottom View)

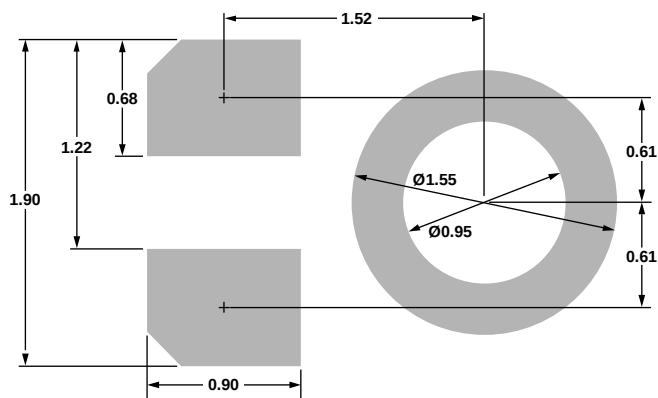


Figure 9. Recommended CE-3-2 PCB Land Pattern

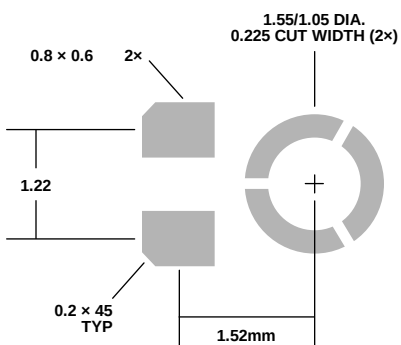


Figure 10. Recommended CE-3-2 Solder Paste Mask

CE-9-1 PACKAGE (ADMP441)



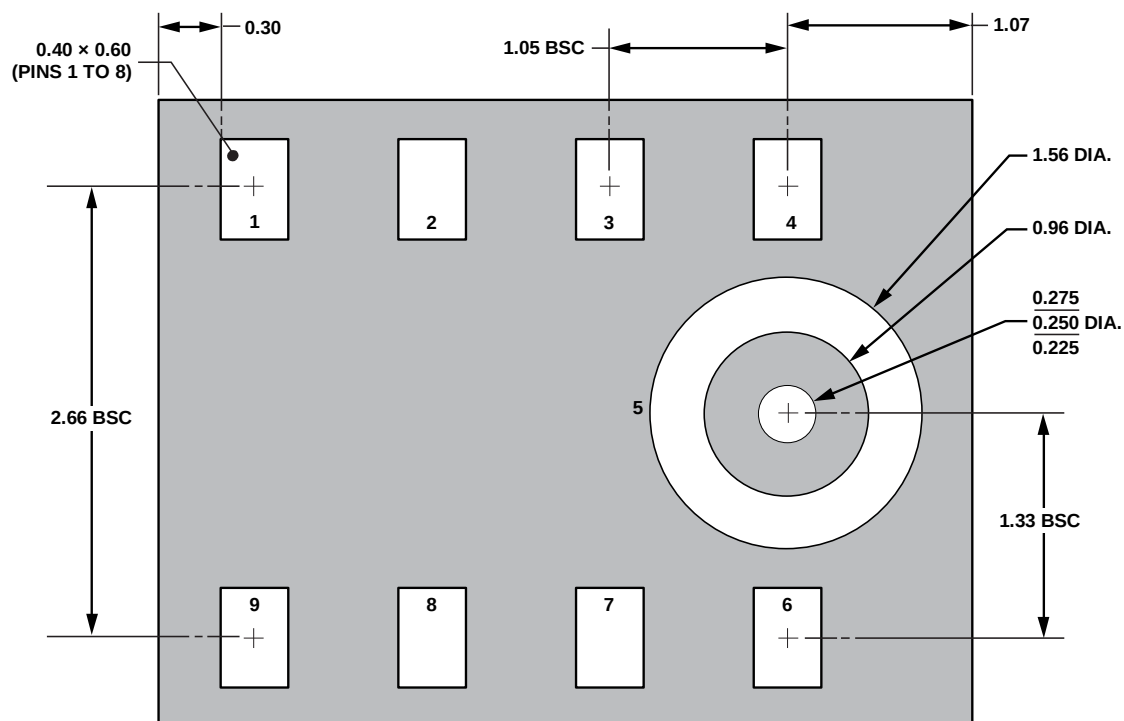


Figure 11. CE-9-1 Device Footprint (Bottom View)

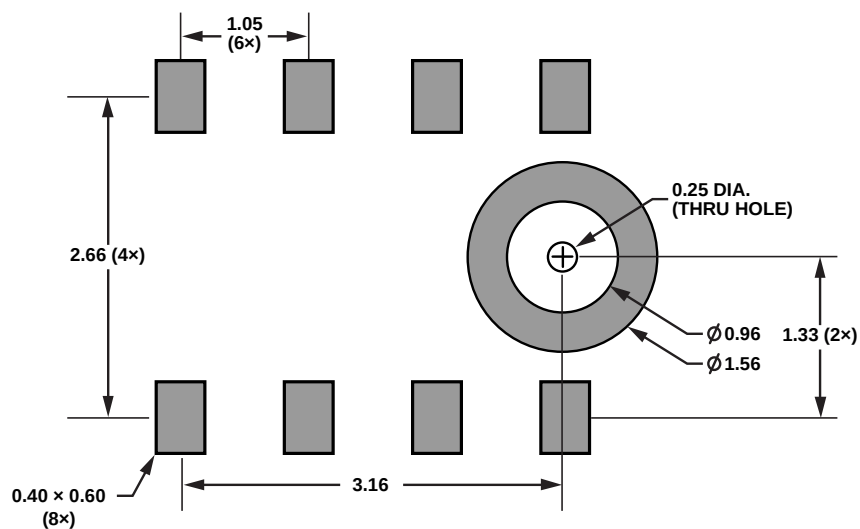

DIMENSIONS SHOWN IN MILLIMETERS

Figure 12. Recommended CE-9-1 PCB Land Pattern

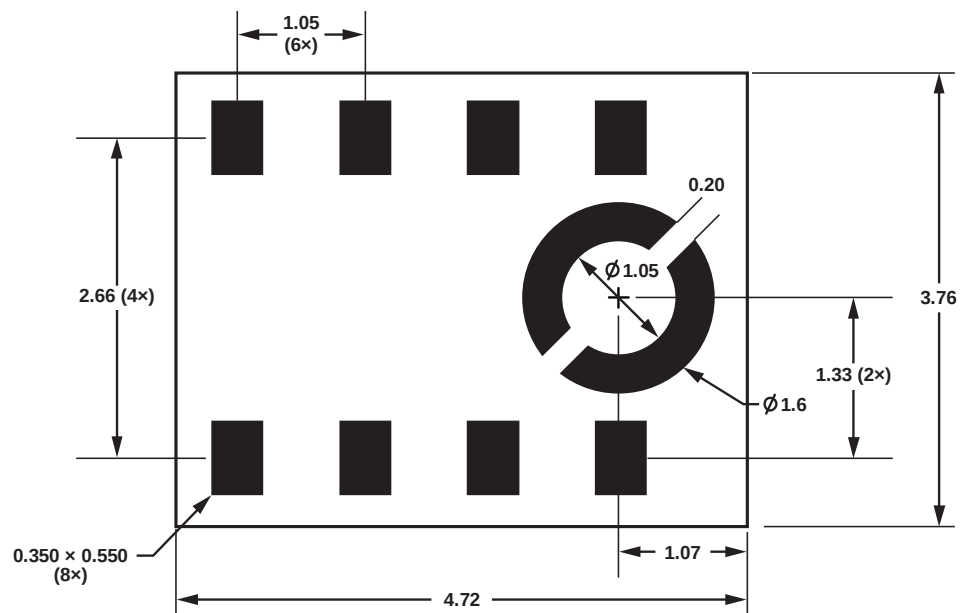

DIMENSIONS SHOWN IN MILLIMETERS

Figure 13. Recommended CE-9-1 Solder Paste Mask

Compliance Declaration Disclaimer:

InvenSense believes this compliance information to be correct but cannot guarantee accuracy or completeness. Conformity documents for the above component constitutes are on file. InvenSense subcontracts manufacturing and the information contained herein is based on data received from vendors and suppliers, which has not been validated by InvenSense.

Environmental Declaration Disclaimer:

InvenSense believes this environmental information to be correct but cannot guarantee accuracy or completeness. Conformity documents for the above component constitutes are on file. InvenSense subcontracts manufacturing and the information contained herein is based on data received from vendors and suppliers, which has not been validated by InvenSense.

This information furnished by InvenSense is believed to be accurate and reliable. However, no responsibility is assumed by InvenSense for its use, or for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. InvenSense reserves the right to make changes to this product, including its circuits and software, in order to improve its design and/or performance, without prior notice. InvenSense makes no warranties, neither expressed nor implied, regarding the information and specifications contained in this document. InvenSense assumes no responsibility for any claims or damages arising from information contained in this document, or from the use of products and services detailed therein. This includes, but is not limited to, claims or damages based on the infringement of patents, copyrights, mask work and/or other intellectual property rights.

Certain intellectual property owned by InvenSense and described in this document is patent protected. No license is granted by implication or otherwise under any patent or patent rights of InvenSense. This publication supersedes and replaces all information previously supplied. Trademarks that are registered trademarks are the property of their respective companies. InvenSense sensors should not be used or sold in the development, storage, production or utilization of any conventional or mass-destructive weapons or for any other weapons or life threatening applications, as well as in any other life critical applications such as medical equipment, transportation, aerospace and nuclear instruments, undersea equipment, power plant equipment, disaster prevention and crime prevention equipment.

©2013 InvenSense, Inc. All rights reserved. InvenSense, MotionTracking, MotionProcessing, MotionProcessor, MotionFusion, MotionApps, DMP, and the InvenSense logo are trademarks of InvenSense, Inc. Other company and product names may be trademarks of the respective companies with which they are associated.



©2013 InvenSense, Inc. All rights reserved.